

UC ZZ 270°



UC for HIGH temperature

CHOOSE UC



ORANGE BOX

TECHNICAL CHARACTERISTICS

- AISI 52100 Steel
- Manganese Phosphate surface treatment
- Increased radial clearance to compensate for thermal expansion
- Molyguard CF-2 grease from -35° C to 270°C

FIELDS OF USE:

- Textile Machinery
- Generators
- Heating Pumps
- Industrial Ventilators
- Dryers
- Etc.



杉優企業有限公司

231新北市新店區中正路466-1號

電話:02-2218-3803 傳真:02-2218-3805

網頁:www.callsmq.com 電郵:sales@callsmq.com



德國快速接頭



電磁制車離合器



台製精密軸承



德國絕緣軸承



歐製精密軸承



精密精密軸承



高溫軸承



中國訂製五金



德國滑動軸承




中國製夾頭

UC FOR HIGH TEMPERATURE

ZZ

Bearing No.	Shaft Dia.		Dimensions(mm)						Basic Dynamic Load Rating (kg)	Basic Static Load Rating (kg)	Weight (kg)	Turns per minute
	d(mm)	D	Bi	Be	n	m	G	ds				
UC 201	12	47	31	17	12,7	18,3	4,8	M6X1.0	1000	630	0,21	275
UC 202	15	47	31	17	12,7	18,3	4,8	M6X1.0	1000	630	0,19	195
UC 203	17	47	31	17	12,7	18,3	4,8	M6X1.0	1000	630	0,18	185
UC 204	20	47	31	17	12,7	18,3	4,8	M6X1.0	1000	630	0,16	170
UC 205	25	52	34	17	14,3	19,7	5,5	M6X1.0	1100	710	0,2	155
UC 206	30	62	38,1	19	15,9	22,2	6	M6X1.0	1520	1020	0,32	130
UC 207	35	72	42,9	20	17,5	25,4	6,5	M8X1.0	2010	1390	0,48	100
UC 208	40	80	49,2	21	19	30,2	8	M8X1.0	2560	1810	0,64	95
UC 209	45	85	49,2	22	19	30,2	8	M8X1.0	2560	1810	0,68	90
UC 210	50	90	51,6	24	19	32,6	10	M10X1.0	2750	2020	0,8	85

UC 270°

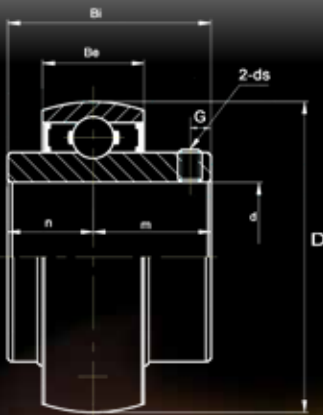

TECHNICAL CHARACTERISTICS

- AISI 52100 Steel
- Manganese Phosphate surface treatment
- Increased radial clearance to compensate for thermal expansion
- Molyguard CF-2 grease from -35° C to 270°C

FIELDS OF USE

- Brick manufacturing kiln karts
- Ceramic industry kilnes
- High temperature rollers
- Steel manufacturing
- Glass manufacturing
- Etc.

